

8 SAFE DIGITAL OUTPUTS, LOW-SIDE SWITCHING FOR D-SC



- 8 digital outputs, 24 V, 48 V, 72 V, 96 V, 110 V
- 300 mA per channel, 1200 mA total
- Low-side switch outputs (load to supply voltage)
- Optical isolation from other cards
- Fail-safe board architecture
- Certified to EN 5012x (SIL 2/4), EN 50159, IEC 61508 (SIL 2/3)
- Developed acc. to EN 50129, EN 50128, IEC 61508
- Extensive supervision functions
- EN 50155 fully compliant
- -40°C to +85°C
- Conformal coating



DIGITAL OUTPUTS FOR D-SC

The K7 is a safe digital output card for use in the duagon SAFE CONTROL (d-SC) System. The d-SC platform performs safe train control functions in rolling stock applications like Automated Train Protection (ATP) or CBTC (Communications Based Train Control). It usually consists of a controller system, e.g., MH50C, and safe remote I/O boxes, e.g., KT8. The K7 can be plugged into any of these systems, with one card providing 8 safe digital outputs with read-back and testing capabilities.

SAFE COMMUNICATION (ETHERCAT AND FSOE)

d-SC I/O boards are EtherCAT slave devices, connected to the host via a backplane "EBUS" link. On top of EtherCAT, a safety layer called FSoE (Fail Safe Over EtherCAT) provides safe real-time Ethernet communication between the host system and the I/O board.

MADE FOR RAIL I/O FUNCTIONS

The K7 can switch voltages from 24 V to 110 V nominal as specified by EN 50155. Typical loads are relay coils, digital inputs of other systems or LED indicators. The outputs are low-side switching, i.e. the load has to be connected to the high side. The I/O card provides functional safety: it enters the safe state if it detects an error. Front I/O is connected via a 24-pin PCB plug for fast installation thanks to reduced wiring.

SAFETY-CERTIFIED

The K7 is certified to CENELEC standards EN 50128 and EN 50129. The board is developed in a SIL 4 process according to EN 50128 and EN 50129. The systematic capability of the K7 is SIL 3 according

to IEC 61508. However, to control a SIL 4 function according to EN 50128 and EN 50129 or SIL 3 function according to IEC 61508, the system design must provide a second cut-off path to put the load into a safe state. All d-SC I/O components come with dedicated certification packages from TÜV SÜD, reducing the integrator's certification effort and risk, and resulting in lower integration costs.

EN 50155 ROLLING STOCK COMPLIANCE

Being usable in all types of different trains optimizes the card's interoperability. It supports operating temperatures of -40°C to +85°C according to EN 50155 class TX. Standard boards include conformal coating. With full EN 50155 compliance and a long-term availability on the market of 10 years minimum from the start of series production, the K7 is a rail-ready component. If required, the K7 can also comply to Railways (Wayside) standard EN 50121-4 and Industrial standard EN 61000-4-5 by connecting an external EMC suppressor circuitry.

SAFE SOFTWARE CONCEPT


All d-SC components are supported by certified QNX BSP and driver software. Application software accesses the K7 via the PACY software framework (Process Data Framework for Cyclic Applications). Its API allows the application to control and monitor all features of the K7.



DATA SHEET



K7 | DIAGRAM

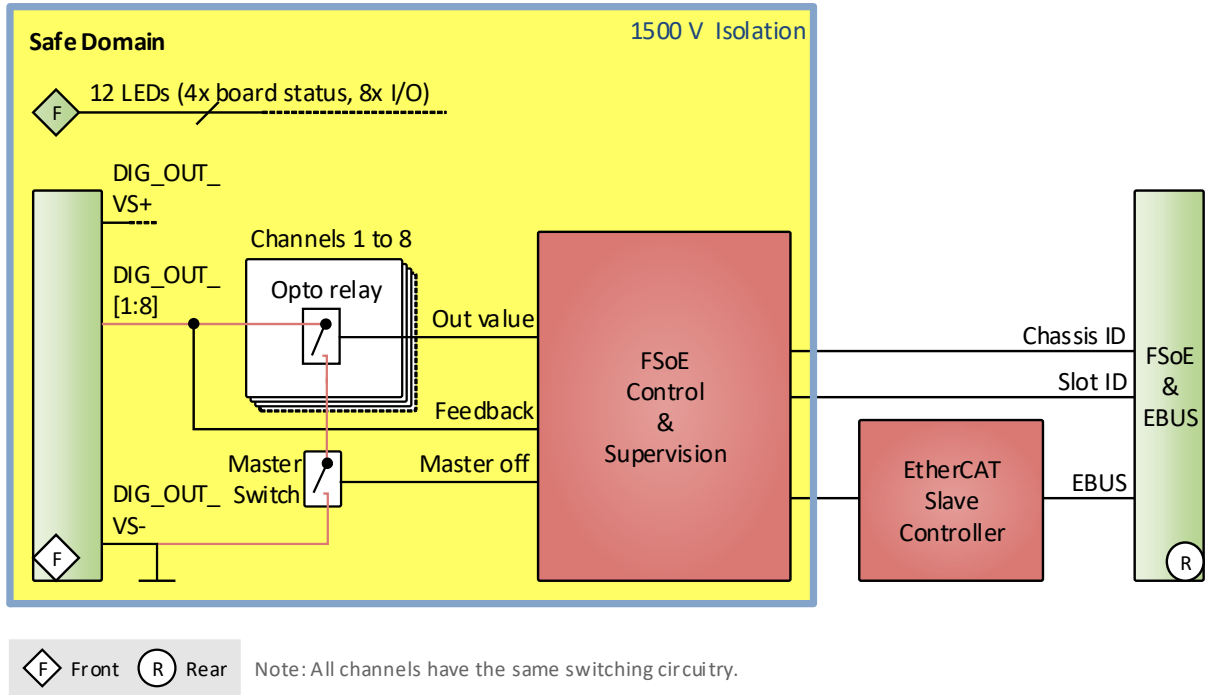

K7 | TECHNICAL DATA

DIGITAL OUTPUTS

- Eight channels
- Output voltage
 - 24 V, 48 V, 72 V, 96 V, 110 V nom. (EN 50155)
 - Voltage supplied from external source
- Output current
 - 300 mA max. per channel
 - 1200 mA max. total
- Output type
 - Low-side switch outputs (load to supply voltage)

FRONT INTERFACES

- Digital I/O
 - One 24-pin PCB plug
 - Eight output channels

- Status LEDs
 - Binary channel status, one LED per channel
 - I/O error
 - FSoE activity
 - Real-time Ethernet error
 - Real-time Ethernet state indication

REAR INTERFACES

- EBUS
 - Two real-time Ethernet channels, ETG.1000
- d-SC FSoE
 - Slot ID and chassis ID for unique FSoE address



SUPERVISION AND CONTROL

- Safe supervisor
 - Check for overvoltage, undervoltage, excess temperature
 - Watchdog
 - Monitor self-test
 - Clock monitoring

BACKPLANE STANDARD

- ETG.1000 EBUS

ELECTRICAL SPECIFICATIONS

- Supply voltage
 - +12 V (10.8 to 13.2 V)
- Power consumption
 - 1.6 W typ.
 - 2.5 W max.

MECHANICAL SPECIFICATIONS

- Dimensions
 - 100 mm x 100 mm, 4 HP
- Weight
 - 196 g (model 06K007-10)

ENVIRONMENTAL SPECIFICATIONS

- Classification for railway applications
 - EN 50155: Rolling stock, vehicle body
 - EN 50125-3: Wayside, at least 1 m off the track inside a switch box, low temperature class T2 and high temperature class TX
- Temperature range (operation)
 - -40°C to +85°C (EN 50155, class TX)
- Temperature range (storage): -40°C to +85°C
- Cooling concept
 - Air-cooled, airflow 0.5 m/s
- Humidity
 - EN 50155: Rolling stock, vehicle body
- Vibration/Shock
 - EN 50155: Rolling stock, vehicle body class B
- Altitude: -300 m to +3000 m
- Pollution degree: PD 2
- Useful life: 20 years

RELIABILITY

- MTBF
 - 750 952 h @ 40°C according to IEC/TR 62380 (RDF 2000) (model 06K007-10)

SAFETY

- Functional Safety
 - Certifiable to SIL 2 with single channel according to EN 50129
 - Certifiable to SIL 4 with dual channel according to EN 50129
 - Hazard rate (HR=PFH) for safety functions $\leq 3E-9$ / h (single card configuration)
 - SIL 2 according to IEC 61508 with single channel (HFT=0)
 - SIL 3 according to IEC 61508 with dual channel (HFT=1)
 - SFF > 99% according to IEC 61508
 - Board maintains safe state after a failure
- Electrical Safety
 - EN 50155: Rolling stock, vehicle body
- Flammability (PCBs)
 - UL 94 V-0
- Fire Protection
 - EN 45545-2, hazard level HL1 to HL3


EMC

- EN 50155: Rolling stock, vehicle body

SOFTWARE SUPPORT

- PACY (Process Data Framework for Cyclic Applications)
- QNX

► See the product User Manual for details on software support: www.duagon.com/products/k7/#doc

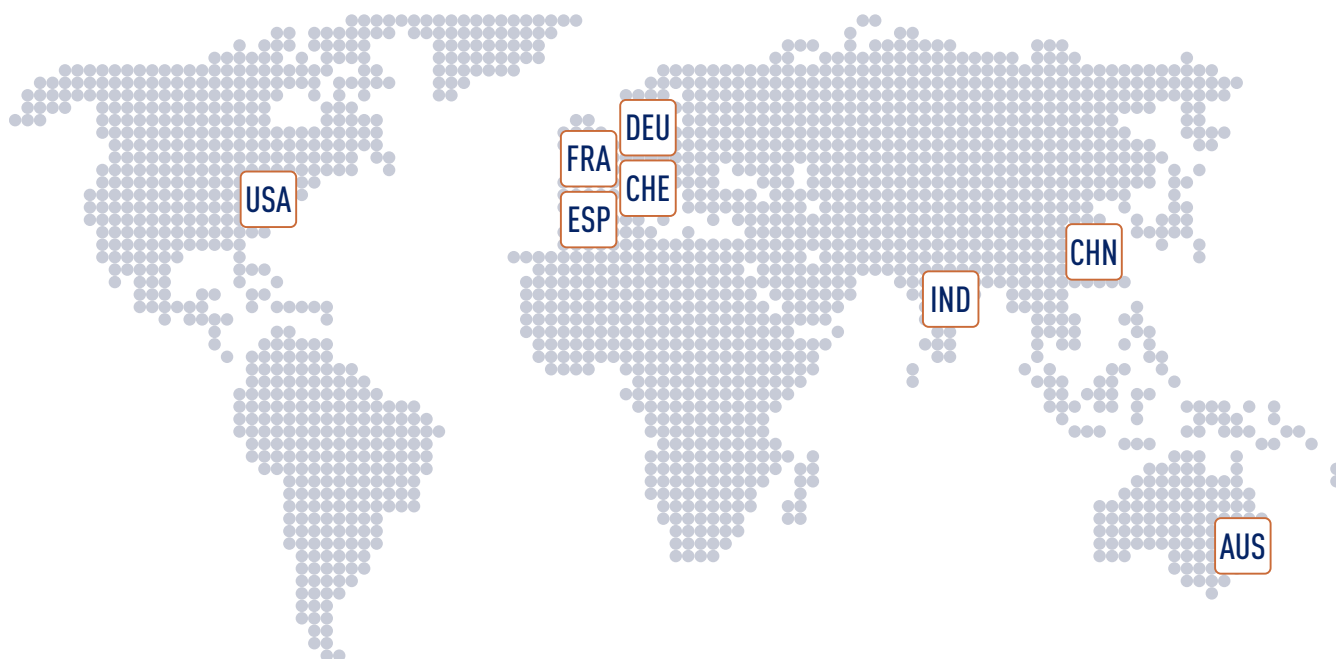

duagon | WORLDWIDE

duagon has a global presence with support and sales representatives across 8 countries. With three decentralized engineering and production sites, our customers take advantage of the added competence and flexibility.

www.duagon.com

SWITZERLAND (HQ)

Dietikon
Phone +41 44 743 73 00
sales@duagon.com

AUSTRALIA

Artarmon
Phone +61 2 9966 9424
sales-aus@duagon.com

CHINA

Shanghai
Phone +86 159 0077 2985
sales-chn@duagon.com

FRANCE

Gaillard
Phone +33 450 955 312
sales-fra@duagon.com

GERMANY

Nuremberg
Phone +49 911 99 335 0
sales-deu@duagon.com

INDIA

New Delhi
Phone +91 11 41 61 12 48
sales-ind@duagon.com

SPAIN

Madrid
Phone +34 917 880 610
sales-esp@duagon.com

USA

Blue Bell
Phone +1 215 542 9575
sales-usa@duagon.com